


## CANTHARELLUS – Ø 150 mm

datasheet

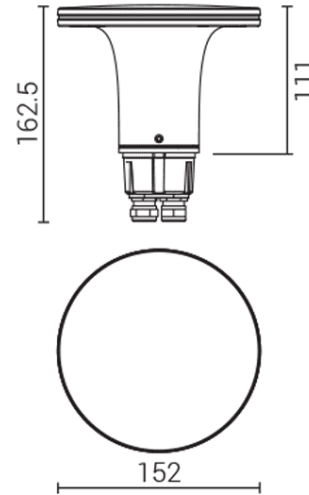
CODE NO. 5521



 AN = Anthracite

27K (2700K) / 3K / 4K

Ø 152 mm

H 111 mm



LAMP	LED
NOMINAL LUMEN	1150
REAL LUMEN OUTPUT	863
WATTAGE	10W
VOLTAGE	207-240V 50/60Hz
IP	IP 65
IK	IK10 (20 joules)
CLASS	 Classe I
CERTIFICATION	
CONFORMITY	EN 60598-1 +2-1
LED ENERGY CLASS	E

Outdoor lighting fixture for pole mounting

Structure: upper part and body made of low copper content primary aluminium alloy

Clear satin polycarbonate diffuser. Anti-glare aluminium internal cone. Downward light diffusion

The body, equipped with a wiring box, can be fitted to Goccia Illuminazione aluminium poles or standard Ø 60 mm poles available on the market

The Ø 150 version is recommended for 375 mm poles

Light source: mains voltage LED module, compatible with most phase-cut dimmers / CRI≥80

Through wiring with two cable glands inside the wiring box

Double varnished finish after pickling, chromic passivation (trivalent chromium), epoxy primer and polyester powder coating

ON REQUEST:

24V low voltage version (code + 24V)

Finishing colours: AG - aluminium grey / CO - corten