


CANTHARELLUS – Ø 200

datasheet

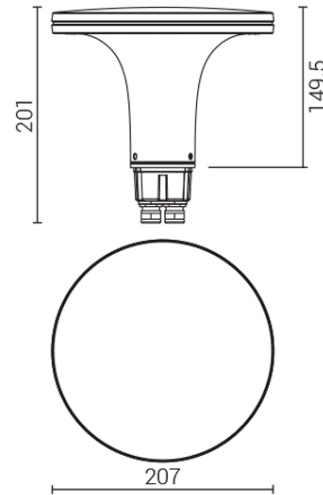
CODE NO. **5522**



 GR = Graphite

3K – 3000K / **4K** – 4000K

Ø 207 mm

H 150 mm



LAMP	LED
NOMINAL LUMEN	2300
REAL LUMEN OUTPUT	1849
WATTAGE	20W
VOLTAGE	220-240V 50/60Hz
IP	IP 65
IK	IK10 (20 joules)
CLASS	 Classe I
CERTIFICATION	
CONFORMITY	EN 60598-1 +2-1
ENERGY CLASS	E

Outdoor lighting fixture for pole installation

Structure: upper part and body made of primary aluminium alloy with low copper content

Clear satin polycarbonate diffuser. Anti-glare aluminium internal cone. Downward light diffusion

The body, equipped with a wiring box, can be fitted to Goccia Illuminazione aluminium posts or standard Ø 60 mm posts available on the market

The Ø 200 version is recommended for 800 or 1875 mm posts

Light source: mains voltage LED module, compatible with most phase-cut dimmers / CRI 80

Through wiring with two PG9 inlets inside the wiring box

Double varnished finish after pickling, chromic passivation (trivalent chromium), epoxy primer and polyester powder coating