

**IANUS 60 – pole-top – mono-emission**

datasheet

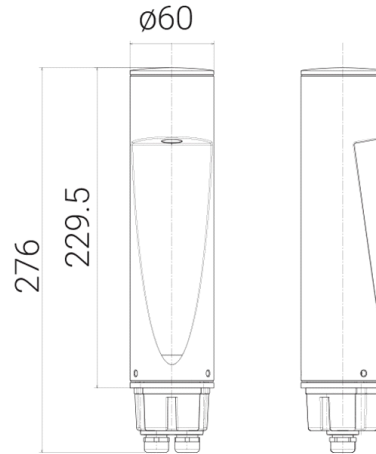
CODE NO. **7071**



**AN** AN = Anthracite  
**AG** AG = Aluminum Grey

**27K (2700K) / 3K / 4K**

Ø 60 mm

H 229,5 mm



LAMP	LED
NOMINAL LUMEN	430
REAL LUMEN OUTPUT	115
WATTAGE	4,6W
VOLTAGE	100+240V 50/60Hz
IP	IP 66
IK	IK10 (20 joules)
CLASS	 Classe I
CERTIFICATION	
CONFORMITY	EN 60598-1 +2-1
LED ENERGY CLASS	F (2700K) / E (3000K - 4000K)

Outdoor lighting fixture for pole mounting

Pole-top in low-copper grade primary aluminium alloy, equipped with two M16 cable glands to allow through wiring; it can be installed on Goccia Illuminazione aluminium poles or on any standard Ø 60 mm pole

Light source: shielded LED inside the diffuser / CRI 80

Driver incorporated in the pole-top

Double varnished finish after pickling, chromic passivation (trivalent chromium), epoxy primer and polyester powder coating

ON REQUEST:

12-24V low voltage version (code + LV)

Finishing colour BR - bronze