




- Degree of protection: IP65
- Ambient temperature: -25–35 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 143 lm/W
- Colour rendering index CRI: 80-89, 4000–4000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Terminal block: connector, 0.4 m cable
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 13
- Max. number of luminaires per circuit breaker C16: 22
- Power factor: 0,95
- Total harmonic distortion: 4
- Energy efficiency class of the light source: C

- Body: steel sheet, white (RAL 9003)
- Diffuser: satin, heat-strengthened safety glass
- Reflector: steel sheet, white (RAL 9003)
- Sealing: EPDM glued to the base of the light
- Connection: connector, 0.4 m cable
- Light fitting for industrial environments with no risk of explosion caused by gas, dust or flammable vapours, for installation onto tall ceilings
- Heat-strengthened safety glass with shatter pursuant to ČSN EN 12150-1
- ON/OFF electronic driver (AC, DC on demand)

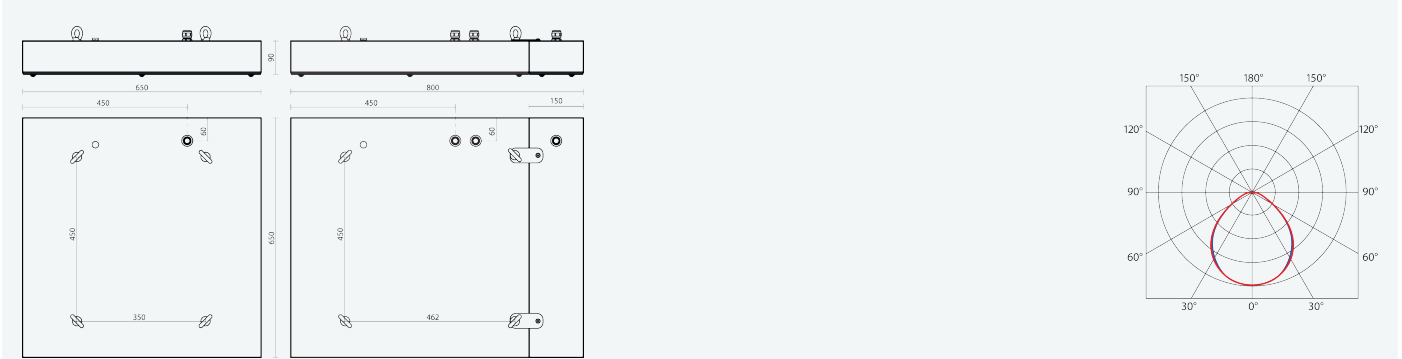

Code	Type	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]
74010	CANOPUS 22000/840	22450	18410	128,7	143	11,6

The values stated for power consumption and luminous flux are in a tolerance of  $\pm 7.5\%$

## FEATURES



## CERTIFICATION



## DOWNLOAD



